



6' SRD - Small Hook **51594**

6' SRD - Large Hook **57652**

Retractable Connector **57665**

ANSI CLASS 1

6' RETRACTABLE SRD WITH HOOK

The Arresta 6' Retractable Carabiner is a lightweight, easy to carry fall limiter supplied with high-strength housing for maximum durability. This ANSI-compliant fall limiter has a 6 ft retractable webbing that provides continuous fall protection and keeps the lifeline out of the worker's way while reducing snagging, fraying, and trip falls.

FEATURES:

- ANSI Class 1
- Lightest available SRD in its class
- Robust plastic casing
- 1" Polyester webbing with energy absorber
- Steel swivel snap hook with gate strength of 3,600lbs.
- Supplied with carabiner
- 310lb. capacity (1 worker)
- Snug fit and supports maximum mobility to the user

WEBBING:


- High-Tenacity Polyester Material
- 1 in Width
- 4,500lb Breaking Strength

VITAL TEST COMPLIANCE:

- Static Strength - 3,000 lbs mass subjected to a 4ft free fall. SRD locked and remained locked until released.
- Dynamic Strength - 300lbs. mass subjected to a zero free fall with extension of 36" webbing; breaking force <1,800lbs.; average breaking force <1,350lbs.; arrest distance <24"



Supplied ANSI Z359.12 Carabiner

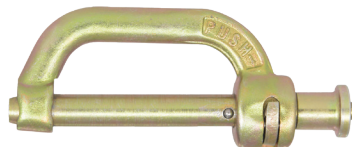

57665 Retractable Connector



57652 6' SRD - Large Hook



51594 6' SRD - Small Hook



6' SRD - Small Hook	51594
6' SRD - Large Hook	57652
Retractable Connector	57665

ANSI CLASS 1


6' RETRACTABLE SRD WITH HOOK

USING YOUR ARRESTA CONNECTOR:

- Dorsal D-ring attachment means SRD can be used as a single and/or Y lanyard
- No additional connector is required
- Reduces the length of the swing during the fall
- Can be attached to any ARRESTA harness
- Installed on the harness webbing, so the dorsal D-Ring is free for attaching other lanyards
- Snug fit design
- Provides 100% tie off configuration
- Provides mobility when moving from one location to another



Lanyards shown in Y formation

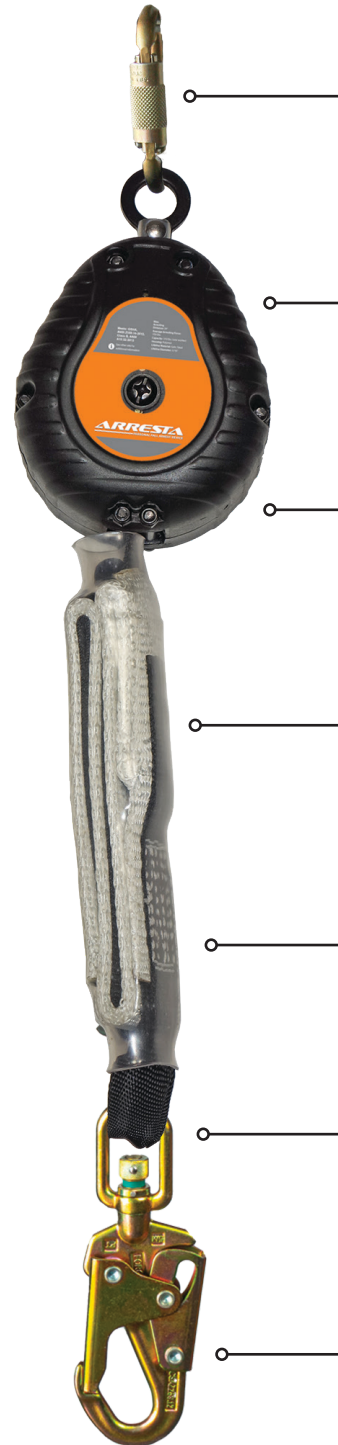

Can be used as a single or Y-lanyard with connector for 100% tie off

High strength housing provides maximum durability

Automatic quick fall arrester to arrest fall to less than <900lbs and fall arrest distance to <24"

Inbuilt textile shock pack with protective cover

6' retractable webbing provides continuous fall protection. Keeps lifeline out of the way, reducing snagging, fraying, and trip falls

Minimal fall distance as compared to shock absorbing lanyard, facilitating retrieval of the fall victim

Steel snap hook at attachment end with ANSI Z 359. 1 2:2009 gate strength of 3600 lbs.