PRODUCT TECHNICAL DATA SHEET

ARRESTA FALL PROTECTION

	SKU
10′ Leading Edge SRD	57653
18′ Leading Edge SRD	57654
25′ Leading Edge SRD	57655

ANSI CLASS 2

LEADING EDGE SRD & CONNECTOR

The ARRESTA LE range of Self Retractable Lifelines are designed to offer leading edge protection to the user when WORKING HORIZONTALLY near Sharp Edges like steel beams and concrete.

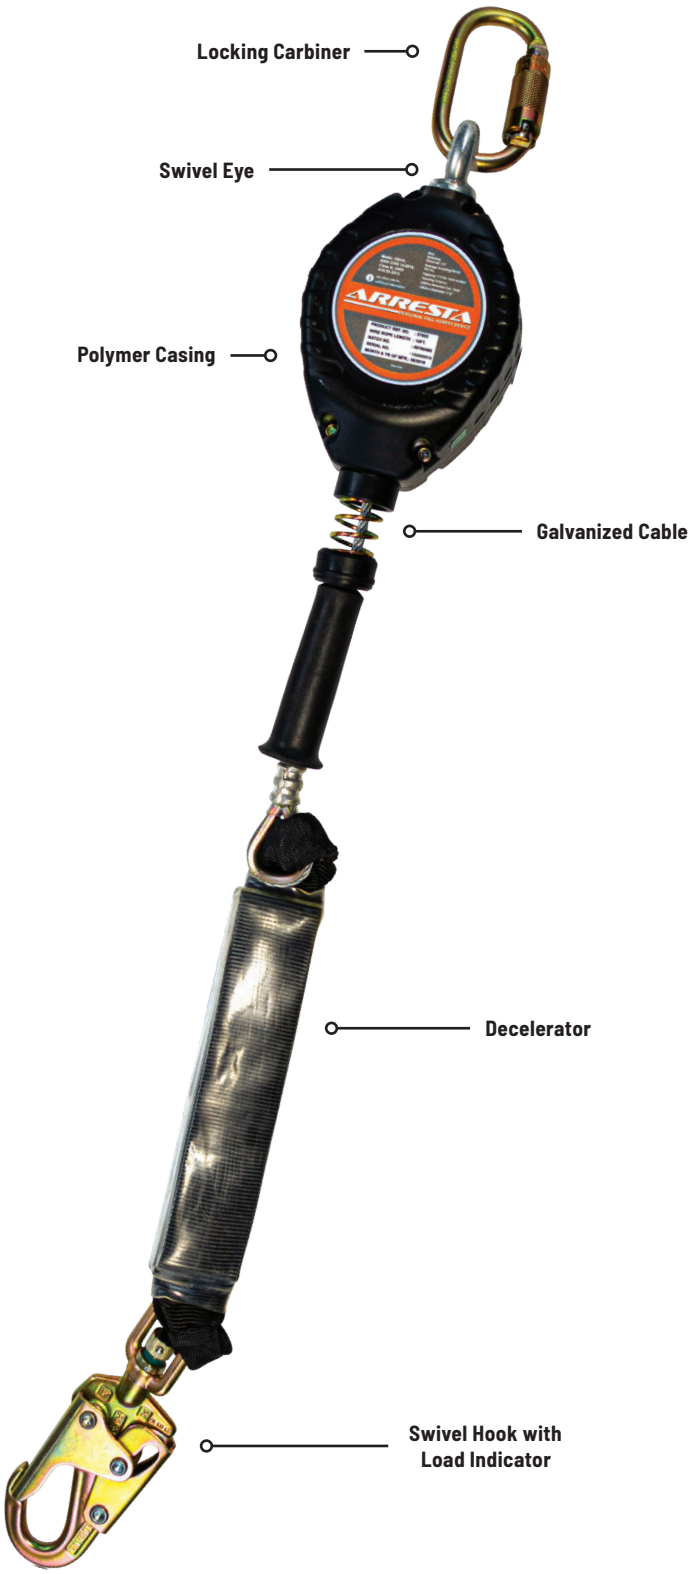

FEATURES:

- ANSI Class 2
- 310 lbs capacity (one worker)
- High strength polymer housing
- Galvanized Steel Cable
- Supplied with carabiner, small swivel hook and storage bag

AVAILABLE LENGTHS:

- 10′ - 57653
- 18′ - 57654
- 25′ - 57655

CABLE:

- Galvanized Steel Rope
- Minimum Breaking Strength: 3400 lbs

VITAL TEST COMPLIANCE:

- Static Strength: 3000 lbs for 1 minute
- Dynamis Strength: 300 lbs mass subjected to a 4ft free fall.
- Dynamic Performance: 282 lbs mass subjected to a zero free fall with extension of 36in wire.
- Breaking Force: Less than 1800 lbs ang. breaking force less than 900 lbs and arrest distance less than 54in

 | © 2024 PowerPak Civil & Safety, LLC. All rights reserved.

PowerPak SITE. SAFETY. SERVICE.