

SPECIFICATION SHEET

CLASS 0 GLOVES

TECHNICAL DETAILS

| | |
|---------------------------|-------------------|
| Description | LINEPRO Class 0 |
| Marking Tag Color | RED |
| Material | Natural Rubber |
| Grip | Smooth |
| Cuff | Straight - Beaded |
| Sizes | 7, 8, 9, 10, 11 |
| Length | 11" |
| Thickness* | 1.02mm |
| Color | BLACK |
| Finish | Chlorinated |
| Test AC Volts** | 5,000V |
| MAX Use AC Volts** | 1,000V |

*Thickness: Single film at back of palm

** ASTM D120-14A


APPLICATIONS

- Power generation
 - Electrical contractors
 - Hybrid automotive repair/service/manufacturing
 - Industrial plant maintenance
 - Utilities
-
- LINEPRO Gloves are made with specially treated high grade natural rubber latex compounds that offer superior dielectric properties.
 - Unique anatomical construction and low temperature flexibility results in lower hand fatigue.
 - ASTM Color coded marking, and vertically integrated supply chain ensure highest quality.
 - Each pair of gloves is inspected and tested in the USA before being packed in a UV resistant bag and individual box for shipping.



DIMENSIONS (in / cm)

| | 7 | 8 | 9 | 10 | 11 |
|----------|-----------|----------|----------|------------|----------|
| A | 11 / 28 | 11 / 28 | 11 / 28 | 11 / 28 | 11 / 28 |
| B | 3.7 / 9.4 | 3.9 / 10 | 4.7 / 12 | 5.3 / 13.5 | 5.9 / 15 |

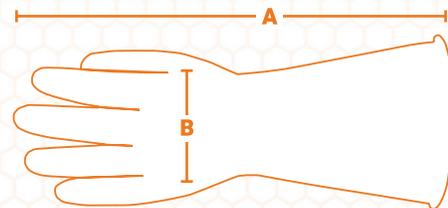

We care for our planet; these gloves are sourced from an environmentally responsible manufacturer.